

imageRUNNER 330/400

The imageRUNNER 330/400 *The Missing Link Between Your Paper and Digital Worlds.*

The Canon imageRUNNER Digital Imaging Systems are uniquely designed to drive enhanced levels of productivity for office copying, printing, faxing and scanning. With speeds of 33 and 40 pages per minute, respectively, the imageRUNNER 330/400 provide the highest quality output of any copier in their class. Offered in stand-alone and networked configurations, the imageRUNNER 330/400 ship with standard duplexing, and can be equipped with a host of optional paper handling and output accessories.



(Shown w/optional accessories)

Standard features include:


- 32MB Image Server and 2.1GB Hard Drive
Advantage: The Image Server memory is responsible for functions, such as Scan Once/Print Many, Auto Image Orientation, and Confidential User Mailboxes.
- Automatic Duplexing
Advantage: Saves paper and filing space.
- 600 x 600 DPI
Advantage: High Resolution resulting in unparalleled image quality.
- Fully Upgradeable
Advantage: Easily converted to a multi-functional product that also prints, faxes, and scans.

Available as options:

- Network Multi-PDL Board-H1 - adds printing functionality (with PCL5e and Postscript III).
- Paper Deck-B1 - allows users to add an additional 3,500 sheets of paper.
- eCopy ScanStation - allows users to scan paper documents and distribute them electronically.
- Scanning Board-D1 - adds scanning functionality.
- Super G3 Fax Board-F1 - adds faxing capabilities.



imageRUNNER 330/400 CONFIGURATION CHART

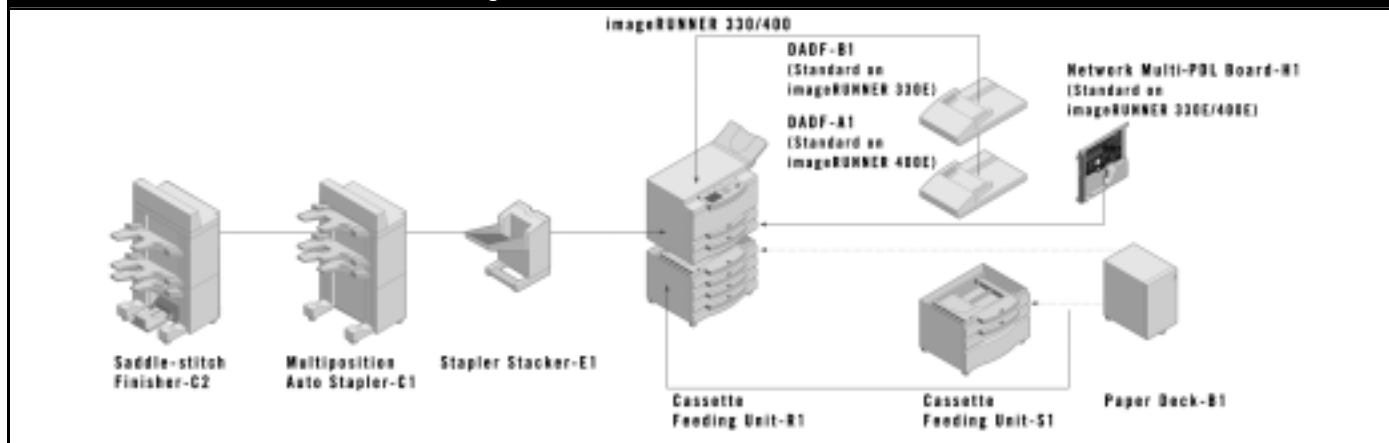

imageRUNNER 330/400 Specifications

<i>Type:</i>	Digital, Multi-function Imaging System
<i>Imaging System:</i>	Laser Dry Electrostatic Transfer
<i>Developing System:</i>	Dry Monocomponent Toner
<i>Image Server Memory:</i>	Projection 32MB (S Models) Standard, Upgradeable to 96MB Total (DIMMs)
<i>First -print Speed:</i>	6 seconds from ADF
<i>Warm-up Time:</i>	81 seconds or less
<i>Multipage Speed:</i>	33 pages per minute (330E) 40 pages per minute (400E)
<i>Resolution:</i>	600 x 600 dpi
<i>Interpolated Resolution:</i>	1200 x 600 dpi
<i>Halftones:</i>	256 gradations of gray (continuous tone)
<i>Scanner:</i>	CCD, 600 dpi resolutions
<i>Document Handling:</i>	Automatic Document Feeder
<i>Automatic Document Feeder Capacity:</i>	50 Sheets (DADF-A1) 30 Sheets (DADF-B1)
<i>Maximum Original Size:</i>	11" x 17"
<i>Output Sizes:</i>	
<i>Cassette Feeding:</i>	Statement to Ledger
<i>Bypass:</i>	Statement to Ledger
<i>Paper Supply:</i>	
<i>Standard:</i>	Dual Front-Loading Cassettes (500 sheets ea.) 50 sheet Stack Bypass 1,000-sheet Paper Deck 2,000 sheet Four-Cassette Feeder 3,500-sheet Paper Deck (Total 5,550 sheets)
<i>Optional:</i>	Stapler Stacker Finisher Multiposition Auto Finisher Saddle-stitch Finisher
<i>Output Options:</i>	Standard Automatic Trayless Duplexing
<i>Duplexing:</i>	
<i>Magnification</i>	
<i>Reduction/Enlargement:</i>	25%-400%, in 1% increments
<i>Exposure Control:</i>	Automatic and Manual (text or photo)
<i>Multiple Copies:</i>	1-999
<i>Paper Weights:</i>	16 to 32 lb.
<i>Drum:</i>	OPC-estimated yield: 55,000 impressions iR330 - 120,000 impressions per month iR400 - 150,000 impressions per month
<i>Duty Cycle:</i>	

ACCESSORIES

Automatic Document Feeder (DADF-A1)

<i>Acceptable Originals:</i>	Statement to Ledger
<i>Capacity:</i>	50 sheets (Letter/20 lb.)
<i>Maximum Paper Weight:</i>	Up to 28 lb.

Automatic Document Feeder (DADF-B1)

<i>Acceptable Originals:</i>	Statement to Ledger
<i>Capacity:</i>	30 sheets
<i>Maximum Paper Weight:</i>	Up to 28 lb.

Cassette Feeding Units

<i>Number of Cassettes:</i>	Two or Four Cassettes
<i>Paper Capacity:</i>	1,000 or 2,000 Sheets (STMT to LGR)
<i>Maximum Paper Weight:</i>	Up to 22 lb. Bond

Paper Deck-B1

<i>Paper Capacity:</i>	3,500 Sheets (LTR)
<i>Paper Weights:</i>	Up to 22 lb. Bond

Stapler Stacker Finisher-E1

<i>Number of Trays:</i>	One Tray
<i>Tray Capacity:</i>	1,000 sheets (LTR)
<i>Staple Position/Capacity:</i>	Top Corner (50 Sheets)

Multiposition Auto Stapler-C1

<i>Number of Trays:</i>	Four Trays, including Interrupt Tray
<i>Tray Capacity</i>	
<i>Top Tray:</i>	300 sheets (LTR)
<i>Middle Tray:</i>	750 sheets (LTR)
<i>Lower Tray:</i>	200 sheets (LTR)
<i>Staple Position/Capacity:</i>	Multiposition Stapling, (1) Top Corner, (2) Side Margin
<i>Stapling Capacity:</i>	50 Sheets

Stapler-stitch Finisher-C2

<i>Number of Trays:</i>	Five Trays, including Interrupt and Saddle-stitch Trays
<i>Tray Capacity</i>	
<i>Top Tray:</i>	300 sheets (LTR)
<i>Middle Tray:</i>	750 sheets (LTR)
<i>Lower Tray:</i>	200 sheets (LTR)
<i>Saddle-stitch Tray:</i>	300 sheets
<i>Staple Positions:</i>	Multiposition Stapling, (1) Top Corner, (2) Side Margin, (3) Saddle-stitch
<i>Stapling Capacity:</i>	50 Sheets (Saddle-stitch: 15 Sheets)

Saddle-stitch Specifications

<i>Total Sides</i>	60 Total Sides (15 Sheets)
<i>Imaged:</i>	10 Total Sets
<i>Total Sets:</i>	V-folding Standard

Network Multi-PDL Board-H1

<i>Type:</i>	Embedded Print Network
<i>Processor:</i>	MIPS R5000 200MHz RISC
<i>RAM</i>	
<i>Standard:</i>	32MB (168 Pin DIMM)
<i>Maximum:</i>	64MB (168 Pin DIMM)
<i>PDL Support:</i>	Adobe Postscript 3-PCL5e
<i>PostScript Fonts:</i>	139 Type 1 and 3
<i>PCL Fonts:</i>	45 TrueType
<i>Hard Disk:</i>	6.0GB
<i>Optimized Features:</i>	Continuous Print RIP-While-Print

Printer Interface

<i>Ports:</i>	Bi-Directional Centronics
<i>Topology:</i>	Ethernet Token Ring (Optional)
<i>Speed:</i>	10/100 Mbps Ethernet 4/16 Mbps Token Ring

Protocols Supported

<i>Ethernet:</i>	TCP/IP, IPX/SPX, Ethertalk
<i>Token Ring:</i>	TCP/IP, IPX/SPX

Network Interface Connections

<i>Ethernet:</i>	10BaseT (RJ-45), 10Base-5 RJ-45, DB-9
<i>Token Ring:</i>	

Specifications subject to change without notice.